



**SKVAL**

CONTACT US: [John@skval.com](mailto:John@skval.com)

# DN1200 Resilient seat gate valve





**DN50-DN300 Gate Valve  
For POLAND CLIENT.**







**DN500 STRAINER**  
**For RUSSIA CLIENT**



# EN1092-1, EN1092-2 F4&F5&F1 WRAS APPROVED EPDM & COATING



## Test report

<b>KRS code</b> 胶号	CAA7LNZ	<b>Customer code</b> 顾客胶号		<b>Lot No.</b> 批号	160316		<b>Order No.</b> 订单号	SKRS-2659-16	<b>Customer</b>	
<b>Properties</b> 性能	<b>Hardness</b> 硬度	<b>Specific Gravity</b> 密度	TC10	TC90	ML	MH	<b>Mooney Viscosity</b> 门尼粘度 ML1+4 100°C	<b>Tensile strength</b> 拉伸强度	<b>Elongation at break</b> 扯断伸长率	100% moduls
<b>Test standard</b> 试验标准	DIN 53505	DIN EN ISO 1183-1	DIN 53529				DIN 53523	DIN 53504(S2)		
<b>Units</b> 单位	Shore A	g/cm3	min	min	dNm	dNm	ML	MPa	%	MPa
<b>Desired value</b> 指标										
<b>Charge No</b> 车号	<b>Shift</b> 班次				lab					
1	75	1.14	0.80	4.82	1.06	28.23		12.9	232	

Operator: Huyongsheng

confirm: Linchunhong

Date: 2016/3/18

### Remark(备注):

1. Vulcanisation Conditions (硫化条件): 2mm/6mm sample 试片: 170°C×10min, post cure 140°C×240min

2. MDR condition 硫化仪测试条件: 170°C×6min

# Check valve



Dual plate check valve →

← Single flap check valve



Ball check valve





# Check valve



Swing check valve



Flange silent check valve




Foot valve



# Rubber joint




Flanged single ball rubber joint→

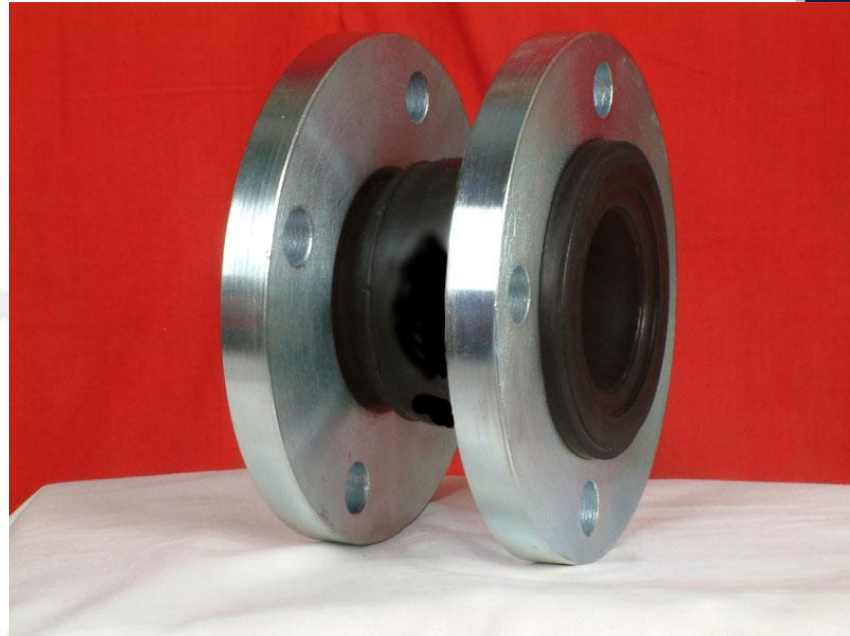

←Twin ball screwed rubber joint



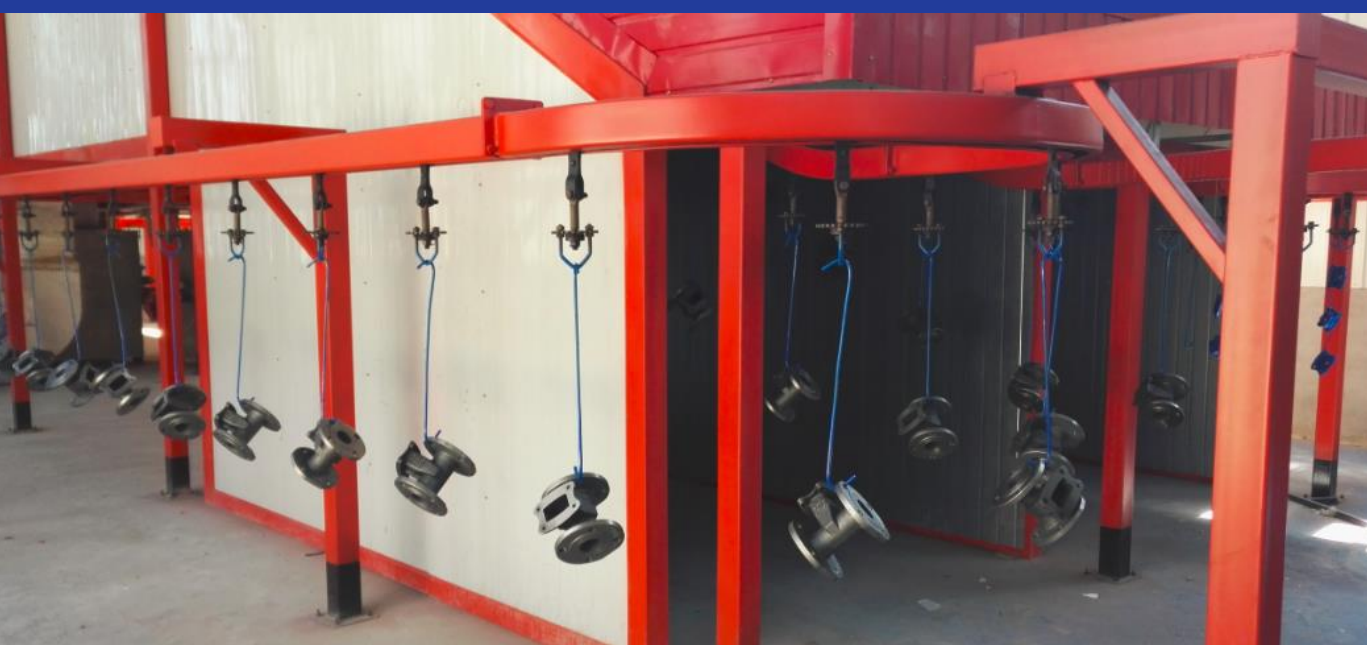

# Stock Casting













成品区