


## 离心过滤机

Centrifugal filter machine



### Working principle

The difference of specific gravity between solid and liquid can be enlarged thousands time while Centrifugalized the machine .After the slurry of two liquids are divided two layers, so the solid-liquid-liquid are separated and discharged all of them out the machine separately by special system. All procedure of feed-in and discharge-out can be automatically and continuously finished in a hermetic system.

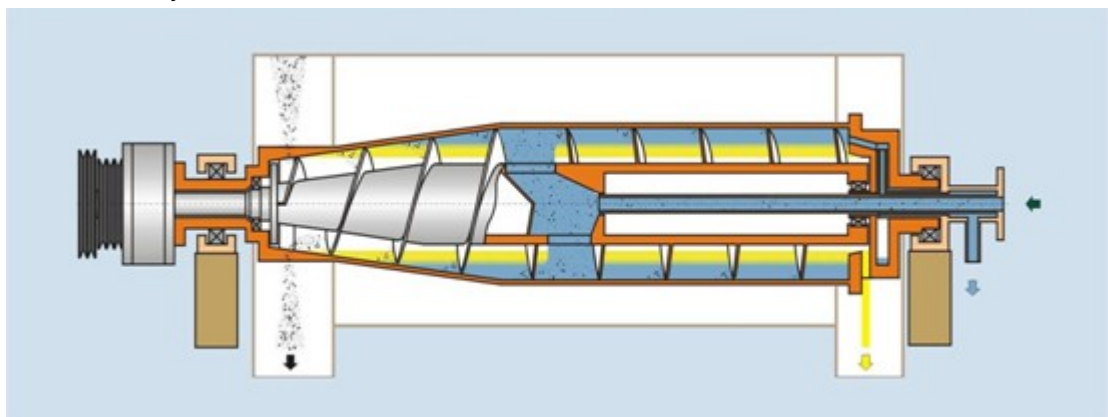

### Specifications

#### Parameter

Standard type	maxspeed (r/min)	Value (g)	Capacity (m <sup>3</sup> /h)	power (KW)	weigh t (Kg)	Dimension (mm)
LWS230×700	5600	4000	0.5—2	5.5—7.5	1000	2000×700×900

LWS230×1000	5600	4000	0.5—3	7.5—11	1400	2300×700×900
LWS320×1280	4000	2900	2—6	15—22	2800	3000×900×1400
LWS380×1140	3500	2600	3—8	15—18.5	2800	3000×900×1120
LWS380×1140	4000	3400	3—10	15—22	3000	3100×1000×1250
LWS380×1520	4000	3400	3—16	22—30	3600	3500×1000×1250
LWS430×1720	3500	3000	6—20	30—37	4500	3900×1100×1350
LWS500×1650	3000	2500	8—25	45—75	5500	3300×1600×1200
LWS500×2000	3300	3000	10—30	45—75	7500	4300×1600×1200
LWS600×2160	2400	2000	15—35	45—75	7500	4300×1680×1160

Contact:

SUZHOU HENGRUNDA IMPORT & EXPORT CO., LTD.

NO. 659 JINMEN ROAD SUZHOU, CHINA

Kevin Deng

0086-0512-65890831

Kevin\_dq@vip.163.com